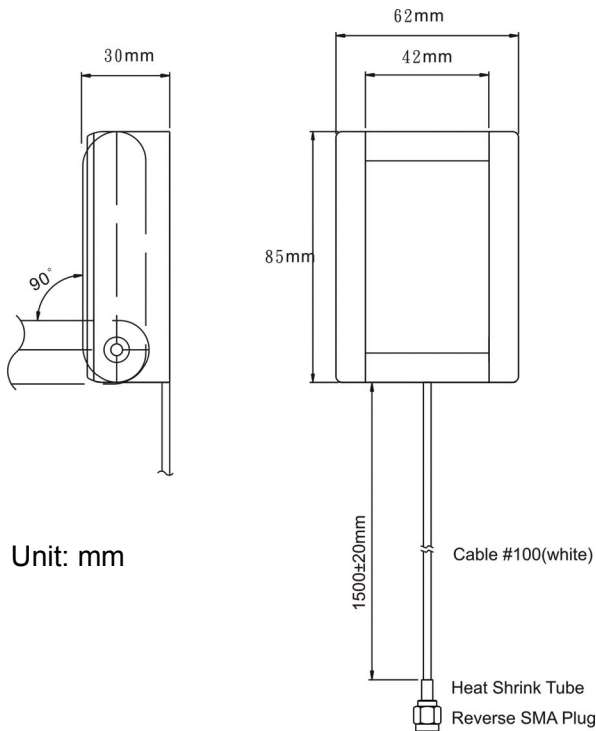


**Mechanical Drawing**

**Electrical Specification**

<b>Frequency Range</b>	2.4~2.4835GHz
<b>Impedance</b>	50Ω
<b>V.S.W.R.</b>	≤2.0
<b>Radiation</b>	Directional
<b>Gain</b>	8dBi
<b>Polarization</b>	Vertical

**Mechanical Specification**

<b>Connector Type</b>	Reverse SMA Plug (Brass)
<b>Material</b>	ABS+PC
<b>Cable</b>	#100 (1500mm)
<b>Bushing Type</b>	--
<b>Dimension</b>	85*62*30mm
<b>Weight</b>	110g (est.)

**Environmental Specification**

<b>Operating Temp</b>	- 20°C ~ + 65°C
<b>Storage Temp</b>	- 20°C ~ + 70°C
<b>Substance</b>	Meets RoHs requirement

